



CHAIN & ACCESSORIES

797 W Commercial Ave.
Lowell, IN 46356
800-523-2367

Index

A

Aircraft Cable 19
Alloy Chain Links 17
Alloy Steel Chain Slings 12
Anchor Chain
 Grade 30 8
 Grade 40 9

B

Binder Chains 10
Binders, Load 11
Bolt Snaps
 Swivel Eye 21
Breakers, Roller Chain 22

C

Cable
 Ferrules 19
 Stops 19
Cable Crimpers 20
Chain
 Alloy Gr 100 6
 Alloy Gr 80 5
 Anchor
 Grade 30 "BBB" 8
 Grade 40 High Test 9
 Binder Chain
 Grade 43 10
 Grade 70 10
 High Test Gr 43 3
 Powder Coated Steel Chain
 Black 7
 Red 7
 White 7
 Yellow 7
 Proof Coil Gr 30 2
 Roller 22
 Security Maxx 8
 Slings 12
 Sprocket 22
 Stainless Steel 9
 Type 304 9
 Type 316 9
 Transport Gr 70 4
 Weightlifter's 10
 Weldless 13
 Double Loop 13
 Jack 13
 Plumber's 13
 Sash 13
 Single Loop 13
Chain Links 16, 17
 Alloy Coupling 17
 Cold Shuts 16
 Connecting 16
 Double Clevis Links 17
 Lap 16
 Mid-Links 17
 Quick 16
 Repair 16
 Clevises 17, 18
 Cold Shuts 16
Connecting Links
 Alloy Chain 17
 Proof Coil Chain 16

D

Double Clevis Links 17
Drive Chain 22

F

Ferrules
 Cable 19

H

High Test Chain 3
Hoist Hooks 13
Hooks
 Claw 13
 Gr 100 Self Locking 13
 Grab 14
 Gr 100 Alloy 14
 Gr 70 Safety Latch 14
 Gr 70 Transport/Alloy 14
 Gr 70 Twist Lock HD Latched 14
 Gr 80 Alloy 14
 Grade 30 Weldable 14
 Grade 43 High Test 14
 Hoist 13
 Latch Repair 15
 Slip 15
 Gr 100 Safety Latch 15
 Gr 70 Transport Safety Latch 15
 Gr 80 Alloy 15
 Grade 43 High Test 15
 T-Grab 13
 Tractor Drawbar 13

L

Lap Links 16
Load Binders 11
 Lever 11
 Ratchet 11
 Utility Chain Tightener 11

M

Master Links 23
Mid-Links 17

N

Nylon Protective Cover 8

P

Padlocks 8
Progressive Resistance Weightlifter's
 Chain 10
Proof Coil Chain 2
Pullers
 Roller Chain 22

Q

Quick Links 16

R

Ratchet Straps 21
Repair Links
 Welded Chain 16, 17
Roller Chain 22
 Breakers 22
 Puller 22
Rubber Straps & Rope 21

S

Safety
 Hook Latch Repair 15
Security Maxx
 Chain 8
 Nylon Protective Cover 8
 Padlocks 8
Shackles 17, 18
 Clevises 13
 Round Pin Anchor 13
 Safety Anchor 13
 Screw Pin Anchor
 Alloy 18
 Hot Dipped Galvanized 17
 Stainless Steel 18
 Webbling 13
SLINGS 12
Slings
 Master Link 18
 Replacement Tag 18
Snaps
 Bolt 21
 Double End 21
 Open End 21
 Swivel Rope 21
Sprocket Chain 22
Stainless Steel
 Roller Chain 22
Straps
 Ratchet 21
 Rubber Tarp 21
 Trap 21

T

Thimbles, Wire Rope 19
Tools
 Roller Chain 22
 Wire Rope Cutter 20
 Wire Rope Swager 20
Transport Chain 4
Turnbuckles 20
 Aluminum 20
 Drop Forged Steel 20

U

Utility Chain Tightener 11

W

Weightlifter's Chain 10
Weldless Chain 13
 Double Loop 13
 Jack 13
 Plumber's 13
 Sash 13
 Single Loop 13
Wire Rope 19
 Clamps 19
 Clips 19
 Crimper 20
 Swager 20
 Thimbles 19
Wire Rope Cutter 20

Grade 30 Chain Proof Coil



A general purpose chain for all ordinary applications not requiring high strength characteristics. Frequently used for light duty tow chains, tie down chains and logging chains. Identified with "L3" or similar grade marking. **Not for overhead lifting.** "Long Link" design (1/4, 5/16, 3/8 only) provides the same working load limits in a lighter chain. Our chain is made in the USA unless noted.

Chain Specifications

Trade Size	Working Load Limit(lbs)	Material Diameter	Inside Length	Inside Width	Weight Per 100 ft
1/8"*	400	.160	.90	.27	21
3/16"*	750	.210	.95	.10	38
1/4"	1300	.275	1.24	.46	63
5/16"	1900	.330	1.30	.49	91
3/8"	2650	.397	1.45	.60	135
1/2"*	4500	.520	1.56	.81	264
5/8"*	6900	.630	1.87	1.00	393

*regular links



● Round Pail

Pails

Part Number	Trade Size	Finish	Qty
38-445	1/8"* IMPORT	Zinc	500'
38-308	3/16"*	Zinc	250'
38-309	1/4"LL	Zinc	141'
38-310	5/16"LL	Zinc	92'
38-311	3/8"LL	Zinc	63'
38-312	1/2"*	Zinc	36'

FREE SHIPPING on drums
and pails of chain!



● Half Drum

Half Drums



● Full Drum

Drums

Part Number	Trade Size	Finish	Qty
38-300D2	1/8"*IMPORT	SC	1000'
38-445D2	1/8"*IMPORT	Zinc	1000'
38-444D2	1/8"*IMPORT	HG	1000'
38-301D2	3/16"*	SC	800'
38-308D2	3/16"*	Zinc	800'
38-400D2	3/16"*	HG	800'
38-302D2	1/4"LL	SC	400'
38-309D2	1/4"LL	Zinc	400'
38-401D2	1/4"LL	HG	400'
38-303D2	5/16"LL	SC	275'
38-310D2	5/16"LL	Zinc	275'
38-402D2	5/16"LL	HG	275'
38-304D2	3/8"LL	SC	200'
38-311D2	3/8"LL	Zinc	200'
38-403D2	3/8"LL	HG	200'
38-305D2	1/2"*	SC	100'
38-312D2	1/2"*	Zinc	100'
38-404D2	1/2"*	HG	100'
38-306D2	5/8"*	SC	75'
38-313D2	5/8"*	Zinc	75'
38-405D2	5/8"*	HG	75'
38-307D2	3/4"*IMPORT	SC	50'
38-406D2	3/4"*IMPORT	HG	50'

Part Number	Trade Size	Finish	Qty
38-300D	1/8"*IMPORT	SC	2000'
38-445D	1/8"*IMPORT	Zinc	2000'
38-444D	1/8"*IMPORT	HG	2000'
38-301D	3/16"*	SC	1600'
38-308D	3/16"*	Zinc	1600'
38-400D	3/16"*	HG	1600'
38-302D	1/4"LL	SC	800'
38-309D	1/4"LL	Zinc	800'
38-401D	1/4"LL	HG	800'
38-303D	5/16"LL	SC	550'
38-310D	5/16"LL	Zinc	550'
38-402D	5/16"LL	HG	550'
38-304D	3/8"LL	SC	400'
38-311D	3/8"LL	Zinc	400'
38-403D	3/8"LL	HG	400'
38-305D	1/2"*	SC	200'
38-312D	1/2"*	Zinc	200'
38-404D	1/2"*	HG	200'
38-306D	5/8"*	SC	150'
38-313D	5/8"*	Zinc	150'
38-405D	5/8"*	HG	150'
38-307D	3/4"*IMPORT	SC	100'
38-406D	3/4"*IMPORT	HG	100'

(LL=Long Links *Regular Links SC= Self-Colored(Plain) HG= Hot Galvanized)

Grade 43 Chain High Test



Designed for use in load binding, logging and other applications requiring higher strength to weight ratios than Grade 30 chain. Used extensively in the trucking industry for binder chains. Identified with "L4" or similar grade marking.

Not for overhead lifting. Our chain is made in the USA unless noted.

Chain Specifications

Trade Size	Working Load Limit(lbs)	Material Diameter	Inside Length	Inside Width	Weight Per 100 ft
1/4"	2600	.275	1.02	.50	69
5/16"	3900	.330	1.15	.49	100
3/8"	5450	.397	1.30	.60	145
1/2"	9200	.520	1.56	.81	265
5/8"	13000	.630	1.87	1.00	393

FREE SHIPPING on drums
and pails of chain!



Pails



● Round Pail

Part Number	Trade Size	Finish	Qty
38-315	1/4"	SC	150'
38-315EG	1/4"	Zinc	135'
38-315HG	1/4"	HG	135'
38-316	5/16"	SC	100'
38-316EG	5/16"	Zinc	90'
38-316HG	5/16"	HG	90'
38-317	3/8"	SC	75'
38-317EG	3/8"	Zinc	63'
38-317HG	3/8"	HG	63'
38-318	1/2"	SC	37'
38-318EG	1/2"	Zinc	37'



● Half Drum

Half Drums

Part Number	Trade Size	Finish	Qty
38-315D2	1/4"	SC	400'
38-315D2EG	1/4"	Zinc	400'
38-315D2HG	1/4"	HG	400'
38-316D2	5/16"	SC	275'
38-316D2EG	5/16"	Zinc	275'
38-316D2HG	5/16"	HG	275'
38-317D2	3/8"	SC	200'
38-317D2EG	3/8"	Zinc	200'
38-317D2HG	3/8"	HG	200'
38-318D2	1/2"	SC	100'
38-318D2EG	1/2"	Zinc	100'
38-318D2HG	1/2"	HG	100'
38-319D2	5/8"	SC	75'
38-319D2HG	5/8"	HG	75'

(SC= Self-Colored(Plain) HG= Hot Galvanized)



Drums



● Full Drum

Part Number	Trade Size	Finish	Qty
38-315D	1/4"	SC	800'
38-315DEG	1/4"	Zinc	800'
38-315DHG	1/4"	HG	800'
38-316D	5/16"	SC	550'
38-316DEG	5/16"	Zinc	550'
38-316DHG	5/16"	HG	550'
38-317D	3/8"	SC	400'
38-317DEG	3/8"	Zinc	400'
38-317DHG	3/8"	HG	400'
38-318D	1/2"	SC	200'
38-318DEG	1/2"	Zinc	200'
38-318DHG	1/2"	HG	200'
38-319D	5/8"	SC	150'
38-319DHG	5/8"	HG	150'

Grade 70 Chain Transport



An improvement over High Test chain, it meets stringent Department of Transportation (DOT) regulations with smaller, easier to handle chain. Identified with "L70" or similar grade marking. **Not for overhead lifting.** Packaged in drums, pails and cut to order. Supplied in yellow (gold) chromate finish for easy identification and rust prevention.

Our chain is made in the USA unless noted.

Chain Specifications

Trade Size	Working Load Limit(lbs)	Material Diameter	Inside Length	Inside Width	Weight Per 100 ft
1/4"	3150	.279	1.24	.50	74
5/16"	4700	.330	1.15	.49	100
3/8"	6600	.397	1.30	.60	145
1/2"	11300	.520	1.56	.81	264



Pails



● Round Pail

Part Number	Trade Size	Finish	Qty
38-324	1/4"	Gold	135'
38-325	5/16"	Gold	100'
38-326	3/8"	Gold	75'
38-327	1/2"	Gold	37'



FREE SHIPPING on drums
and pails of chain!



● Half Drum

Half Drums

Part Number	Trade Size	Finish	Qty
38-324D2	1/4"	Gold	400'
38-325D2	5/16"	Gold	275'
38-326D2	3/8"	Gold	200'
38-327D2	1/2"	Gold	100'
38-420D2	5/8"	Gold	75'



● Full Drum

Drums

Part Number	Trade Size	Finish	Qty
38-324D	1/4"	Gold	800'
38-325D	5/16"	Gold	550'
38-326D	3/8"	Gold	400'
38-327D	1/2"	Gold	200'
38-420D	5/8"	Gold	150'

How to choose your chain and attachments.

1. Know your working load limits and don't exceed them.
2. Use ONLY Grade 80 or Grade 100 Alloy for overhead lifting.
3. Use Gr 43 or Gr 70 chain for binding loads on over the road hauling.
4. Use Gr 30 chain for general purpose binding, towing, log chains and general shop use..
5. Match components like hooks, connecting links and binders with the chain having a similar or lower working load limits - use high test hooks on high test chain, transport hooks on transport chain, etc. etc.

Grade 80 Chain Alloy



Rugged, versatile, high strength chain manufactured from special alloy steel. This chain is quenched and tempered, proof tested and **certified for overhead lifting** applications. Meets NACM, ASTM and OSHA specifications. Identified with ""L8"" or similar grade marking. Gr 100 Alloy available on special order. Certified lifting assemblies available on special order. Packaged in drums, pails and cut to order. Shot Blast (Self-colored) finish.

Chain Specifications

Trade Size	Working Load Limit(lbs)	Material Diameter	Inside Length	Inside Width	Weight Per 100 ft
9/32"	3500	.279	.88	.41	72
5/16"	4500	.330	1.02	.48	106
3/8"	7100	.397	1.22	.57	150
1/2"	12000	.520	1.56	.75	261
5/8"	18100	.630	1.78	.86	382
3/4"	28300	.787	2.23	1.07	595
7/8"	34200	.875	2.25	1.14	776
1"	47700	1.00	3.07	1.49	939
1-1/4"	72300	1.26	3.25	1.66	1571

Cut Lengths

Part Number	Trade Size	Finish
38-321CL	9/32"	Self-Colored
38-328CL	5/16"	Self-Colored
38-322CL	3/8"	Self-Colored
38-323CL	1/2"	Self-Colored
38-329CL	5/8"	Self-Colored
38-440CL	3/4"	Self-Colored
38-441CL	7/8"	Self-Colored
38-442CL	1"	Self-Colored
38-443CL	1-1/4"	Self-Colored

FREE SHIPPING on drums and pails of chain!



Pails

Part Number	Trade Size	Finish	Qty
38-321	9/32"	Self-Colored	100'
38-328	5/16"	Self-Colored	80'
38-322	3/8"	Self-Colored	60'
38-323	1/2"	Self-Colored	40'



● Half Drum

Half Drums

Part Number	Trade Size	Finish	Qty
38-321D2	9/32"	Self-Colored	400'
38-328D2	5/16"	Self-Colored	275'
38-322D2	3/8"	Self-Colored	250'
38-323D2	1/2"	Self-Colored	150'
38-329D2	5/8"	Self-Colored	100'
38-440D2	3/4"	Self-Colored	50'
38-441D2	7/8"	Self-Colored	50'
38-442D2	1"	Self-Colored	55'
38-443D2	1-1/4"	Self-Colored	45'



● Full Drum

Drums

Part Number	Trade Size	Finish	Qty
38-321D	9/32"	Self-Colored	800'
38-328D	5/16"	Self-Colored	550'
38-322D	3/8"	Self-Colored	500'
38-323D	1/2"	Self-Colored	300'
38-329D	5/8"	Self-Colored	200'
38-440D	3/4"	Self-Colored	100'
38-441D	7/8"	Self-Colored	100'
38-442D	1"	Self-Colored	100'
38-443D	1-1/4"	Self-Colored	90'

Grade 100 Chain

Alloy



Alloy Grade 100 Chain is American made, produced from the highest quality domestic alloy steel and finished with a black or gray finish that is not a rust preventative. Meeting the specifications of the NACM, ASTM, and OSHA, our chain and Grade 100 attachments offer a design factor of 4 to 1. Quality testing is done throughout the manufacturing process. Each link is individually proof tested and certified.

Chain Specifications

Working					
Weight Trade Size	Load Limit(lbs)	Material Diameter	Inside Length	Inside Width	Per 100 ft
9/32"	4300	.281	.88	.40	73
3/8"	8800	.394	1.25	.57	144
1/2"	15000	.512	1.56	.73	246
5/8"	22600	.630	1.92	.86	370
3/4"	35300	.787	2.40	1.07	580



FREE SHIPPING on drums and pails of chain!



Cut Lengths

Part Number	Trade Size	Finish
38-399CL	9/32"	Self-Colored
38-397CL	3/8"	Self-Colored
38-398CL	1/2"	Self-Colored
38-407CL	5/8"	Self-Colored
38-408CL	3/4"	Self-Colored



Pails



Part Number	Trade Size	Finish	Round Pail Qty
38-339	9/32"	Self-Colored	100'
38-397	3/8"	Self-Colored	60'
38-398	1/2"	Self-Colored	40'



● Half Drum

Half Drums

Part Number	Trade Size	Finish	Qty
38-399D2	9/32"	Self-Colored	400'
38-397D2	3/8"	Self-Colored	250'
38-398D2	1/2"	Self-Colored	150'
38-407D2	5/8"	Self-Colored	100'
38-408D2	3/4"	Self-Colored	50'



● Full Drum

Drums

Part Number	Trade Size	Finish	Qty
38-399D	9/32"	Self-Colored	800'
38-397D	3/8"	Self-Colored	500'
38-398D	1/2"	Self-Colored	300'
38-407D	5/8"	Self-Colored	200'
38-408D	3/4"	Self-Colored	100'

Powder Coated Steel Chain

FREE SHIPPING on all powder coated chain!

Safety Yellow

is the most commonly used chain for marking off machinery in industrial plants or any safety related barrier application.



Chain Specifications

Trade Size	Working Load Limit(lbs)	Material Diameter	Inside Length	Inside Width	Weight Per 1 ft
3/16"	520	.192	1.31	.05	.3
7/32"	670	.218	1.39	.38	.36
1/4"	880	.25	1.52	.45	.48
5/16"	1375	.312	1.85	.56	.69

Lengths

Part Number	Trade Size	Finish	Qty
38-412	3/16"	Safety Yellow	200'
38-413	7/32"	Safety Yellow	400'
38-430	1/4"	Safety Yellow	100'
38-431	5/16"	Safety Yellow	100'

Red

is often used for marking off dangerous locations (explosive areas, high voltage areas, hazardous material locations, etc) in industrial plants, construction sites and oil rigs.



Chain Specifications

Trade Size	Working Load Limit(lbs)	Material Diameter	Inside Length	Inside Width	Weight Per 1 ft
3/16"	520	.192	1.31	.05	.3
1/4"	880	.25	1.52	.45	.48

Lengths

Part Number	Trade Size	Finish	Qty
38-435	3/16"	Red	100'
38-436	1/4"	Red	100'

White

is often used for marine applications and outdoor barriers along pathways and to mark off gardens.



Chain Specifications

Trade Size	Working Load Limit(lbs)	Material Diameter	Inside Length	Inside Width	Weight Per 1 ft
3/16"	800	.218	.97	.40	.3
1/4"	1300	.276	1.19	.50	.48
5/16"	1900	.334	1.12	.50	.69

Lengths

Part Number	Trade Size	Finish	Qty
38-414D2	3/16"	White	800'
38-414C	3/16"	White	100'
38-414CL	3/16"	White	20'
38-415	1/4"	White	96'
38-416	5/16"	White	60'

Black

is our most commonly purchased outdoor barrier chain for use along pathways and to mark off gardens, sidewalks and parking lots.



Chain Specifications

Trade Size	Working Load Limit(lbs)	Material Diameter	Inside Length	Inside Width	Weight Per 1 ft
1/4"	1300	.275	1.24	.46	.48
5/16"	1900	.330	1.30	.49	.69
3/8"	2650	.397	1.45	.60	
1/2"	4500	.52	1.56	.81	

Lengths

Part Number	Trade Size	Finish	Qty
38-418D2	1/4"	Black	400'
38-418	1/4"	Black	133'
38-418CL	1/4"	Black	20'
38-452D2	5/16"	Black	275'
38-417D2	3/8"	Black	200'
38-417	3/8"	Black	66'
38-417CL	3/8"	Black	20'
38-453D2	1/2"	Black	100'
38-453	1/2"	Black	40'
38-453CL	1/2"	Black	10'



Security Maxx Chain




Security Maxx chain is "thru hardened" and not "case hardened" like our competitors. Our thru hardened chain has a hardness of 38 to 42 HRC which is the highest you can get on a thru hardened chain. AND it's hard all the way through. The 3/8" size will withstand the bite of a 4 ft bolt cutter under 300 lbs of weight! Use the 1/2" size and the jaws of 90% of all bolt cutters can't fit around it.

Chain Specifications				
Size	Diameter	Length	Width	Wt Per
3/8	0.394-0.400" (10mm)	1.51" (38.2mm)	0.66" (17.0mm)	1.61 lb
1/2	0.512-0.524" (13mm)	1.76" (44.5mm)	0.83" (21.0mm)	2.82 lb

Lengths			
Part Number	Trade Size	Finish	Qty
38-447CL	3/8"	Zinc	4'+
38-448CL	1/2"	Zinc	4'+

Heavy Duty Padlocks

SOBO Heavy Duty Padlocks you can be assured of the high security and durability our locks will provide. Feel the weight in your hand. Turn the key or release the shackle and note that the motion is smooth with no spring loaded parts to bind or wear out over time.

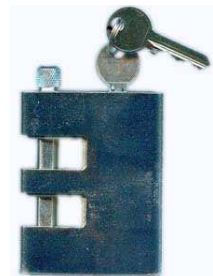

Part Number	Use w/chain	Qty
9-655KD	3/8"-1/2"	1
9-655KA	3/8"-1/2"	1

Nylon Protective Cover

Cover is woven from thousands of nylon filaments into a self-renewing, abrasion-resistant fabric sleeve. As it is scuffed and worn, its filaments friz forming an even thicker more protective shield. This smooth-bore sleeve is easily installed over hose, chains, cables or springs and may be secured with nylon cable ties or band-clamps.



Item No.	Use w/chain	Qty
9-673	3/8"	4'+
9-674	1/2"	4'+

Grade 30 "BBB" Anchor Chain

A low carbon steel, general purpose anchor (windlass) chain, with a short, compact link. The short link makes it more flexible and ideally suited as a windlass chain. Compatible with all major brands of windlasses. Check fit or contact windlass manufacturer before purchase. Our extra thick hot dip galvanized finish is recommended for all marine applications but BBB anchor chain is also available electro-zinc plated and self-colored.

Chain Specifications

Trade Size	Working Load		Material Diameter	Inside Length	Inside Width	Links Per 1ft
	Limit(lbs)					
1/4"	1300		.281	.87	.43	14
5/16"	1900		.343	1.00	.50	12
3/8"	2650		.406	1.09	.62	11
1/2"	4500		.531	1.34	.75	9

Pails

Part Number	Trade Size	Finish	Qty
38-434	1/4"	HG	141'
38-424	5/16"	HG	92'
38-425	3/8"	HG	63'

FREE SHIPPING on anchor chain!

Half Drums

Part Number	Trade Size	Finish	Qty
38-434D2	1/4"	HG	400'
38-424D2	5/16"	HG	275'
38-425D2	3/8"	HG	200'

Drums

Part Number	Trade Size	Finish	Qty
38-424D	5/16"	HG	550'
38-425D	3/8"	HG	400'
38-433D	1/2"	HG	200'

Grade 40 High Test Anchor Chain

A high tensile strength carbon steel anchor (windlass) chain with an ISO short link. The short link makes it more flexible and ideally suited as an windlass chain. Check fit or contact windlass manufacturer before purchase. This extra thick hot dip galvanized finish is recommended for all marine applications but this anchor chain is also available electro-zinc plated and self-colored.

Chain Specifications

Trade Size	Working		Material Diameter	Inside Length	Inside Width	Links Per 1ft
	Load Limit(lbs)					
1/4"	2600		.274	.845	.41	14.2
5/16"	3900		.330	1.03	.50	11.7
3/8"	5400		.394	1.22	.60	9.8
7/16"	7200		.467	1.40	.66	8.6
1/2"	9200		.510	1.59	.77	7.6

Half Drums

Part Number	Trade Size	Finish	Qty
38-426D2	1/4"	HG	400'
38-421D2	5/16"	HG	275'
38-422D2	3/8"	HG	200'
38-423D2	7/16"	HG	150'
38-432D2	1/2"	HG	100'

Pails

Part Number	Trade Size	Finish	Qty
38-426	1/4"	HG	134'
38-421	5/16"	HG	90'
38-422	3/8"	HG	62'

FREE SHIPPING on anchor chain!

Drums

Part Number	Trade Size	Finish	Qty
38-426D	1/4"	HG	800'
38-421D	5/16"	HG	550'
38-422D	3/8"	HG	400'
38-423D	7/16"	HG	300'
38-432D	1/2"	HG	200'

Stainless Steel Chain

Type 304 Imported

A general purpose, rustproof stainless chain designed for ordinary applications not requiring high strength characteristics nor used in extremely corrosive environments. Imported only. Do not use near salt water.

Chain Specifications

Trade Size	Working		Material Diameter	Inside Length	Inside Width	Weight Per 100 ft
	Load Limit(lbs)					
1/8"	375		.149	.93	.28	17
3/16"	830		.204	.94	.40	38
1/4"	1450		.275	1.24	.47	61
5/16"	2200		.310	1.26	.50	84
3/8"	3000		.394	1.38	.57	140
1/2"	4600		.512	1.79	.72	234

Cut Lengths

Part Number	Trade Size	Finish	Qty
38-395FT	1/8"	SS	50'+
38-330FT	3/16"	SS	50'+
38-331FT	1/4"	SS	50'+
38-332FT	5/16"	SS	25'+
38-333FT	3/8"	SS	25'+
38-334FT	1/2"	SS	10'+

Type 316 Imported

A rugged, highly corrosion resistant, low magnetic stainless used in chemical plants worldwide. Best grade for salt water and marine applications

Chain Specifications

Trade Size	Working		Material Diameter	Inside Length	Inside Width	Weight Per 100 ft
	Load Limit(lbs)					
1/8"	375		.149	.93	.28	17
3/16"	830		.204	.94	.40	38
1/4"	1450		.275	1.24	.47	61
5/16"	2200		.310	1.26	.50	84
3/8"	3000		.394	1.38	.57	140
1/2"	4600		.512	1.79	.72	234

Cut Lengths

Part Number	Trade Size	Finish	Qty
38-396FT	1/8"	SS	50'+
38-335FT	3/16"	SS	50'+
38-336FT	1/4"	SS	50'+
38-337FT	5/16"	SS	25'+
38-338FT	3/8"	SS	25'+
38-339FT	1/2"	SS	10'+

Progressive Resistance Weightlifter's Chain

Connecting (small) chains slide over the ends of the bar. As you lift, the weight of the chain progressively increases as more and more chain lifts off the floor. The weight you are lifting progressively becomes heavier, providing maximum muscular stimulation throughout the entire range of motion.



Easy set up change between bench press and dead lifts. Thread the attaching chain through the end link for standing lifts or in the middle of the chain (pictured) to shorten the assembly for incline or bench press. Connecting (small) chains slide over the ends of the bar. As you lift, the weight of the chain progressively increases as more and more chain lifts off the floor. The weight you are lifting progressively becomes heavier, providing maximum muscular stimulation throughout the entire range of motion.



FREE SHIPPING
on Weightlifter's Chain!

Part Number	Chain Size	Weight	Length
9-025	1/2"	31	5'
9-025-6	1/2"	36	6'
9-025-7	1/2"	41	7'
9-025-8	1/2"	47	8'
9-027	5/8"	45	5'
9-027-6	5/8"	53	6'
9-027-7	5/8"	60	7'
9-027-REP	5/8"	40	5'
9-029	3/4"	63	5'
9-029-6	3/4"	75	6'



Binder Chains



Grade 43 High Test
Binder Chains
with two High Test
Clevis Grab Hooks
Fully Assembled



Meets DOT Regulations

Chain Size	WLL (lbs)	Part No.	Drum Qty
5/16 x 14'	3,900	38-343	25
5/16 x 16'	3,900	38-344	25
5/16 x 20'	3,900	38-345	20
5/16 x 25'	3,900	38-346	20
3/8 x 14'	5,400	38-350	25
3/8 x 16'	5,400	38-351	25
3/8 x 20'	5,400	38-352	20
3/8 x 25'	5,400	38-353	15

(other lengths available from stock)



Grade 70 Transport
Binder Chains
with two Transport
Clevis Grab Hooks
Fully Assembled



Meets DOT Regulations

Chain Size	WLL (lbs)	Part No.	Drum Qty
5/16 x 16'	4,700	38-354	25
5/16 x 20'	4,700	38-355	25
3/8 x 14'	6,600	38-356	25
3/8 x 16'	6,600	38-357	25
3/8 x 20'	6,600	38-358	20
3/8 x 25'	6,600	38-359	15

(other lengths available from stock)

Grade 80 Alloy also available

Load Binders

USA
Lever Type
 Forged Steel Handle, Forge Alloy Hooks, Meets D.O.T. Specs

Working


IMPORT

Part Number	Pkg Qty	Chain Rating	Load Limit (lbs)	Part Number	Pkg Qty
10-381	1	1/4 G4	2600	10-381A	12
10-758	1	5/16 G4 - 3/8 G4	5400	10-758B	12
N/A		5/16 G4 - 3/8 G7	6600	10-758A	12
10-763	1	5/16 G4 - 3/8 G8	7100	DB-DF-7100	12
10-760	1	3/8 G4 - 1/2 G4	9200	10-760A	6

**Warning: never use above working load limits.*

Regular

Compact

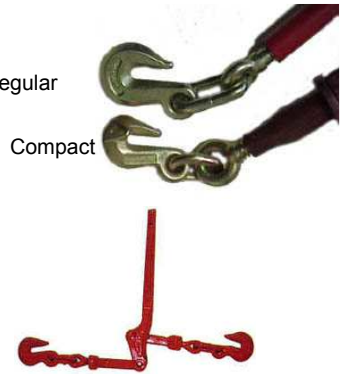

Safety Yellow Lever Type

USA		Chain Rating	Working Load Limit (lbs)	IMPORT	
Part Number	Pkg Qty			Part Number	Pkg Qty
10-770	1	5/16 G4 - 3/8 G4	5400	N/A	
N/A		5/16 G4 - 3/8 G7	6600	10-770A	12
10-771	1	3/8 G4 - 1/2 G4	9200	10-771A	12



Ratchet Type

- Forged Steel Handle • Forge Alloy Hooks • Continuous takeup for infinite adjustment
- Easier to operate and safer to use than lever type binders - no snap back! • Meets D.O.T. Specs

USA		Chain Rating	Working Load Limit (lbs)	IMPORT	
Part Number	Pkg Qty			Part Number	Pkg Qty
10-768	1	1/4 G4	2600	10-768A	12
10-759	1	5/16 G4 - 3/8 G4	5400	10-759A	12
N/A		5/16 G4 - 3/8 G7	6600	10-764A	12
10-762	1	5/16 G4 - 3/8 G8	7100	N/A	
10-761	1	3/8 G4 - 1/2 G4	9200	10-761A	12
10-767	1	1/2 G4 - 5/8 G4	13000	10-767A	8

**Warning: never use above working load limits.*



Utility Chain Tightener

3" takeup, Forged handle and formed swivel J-hooks for tying down equipment and binding light loads. Cylinder tanks, truck end gates, boat trailers. Use with 3/16" proof coil chain (Grade 30).

Part Number	Chain Size	W.L.L.*	Take Up
10-384A	3/16"	375#	3"





1-1/2" takeup, Overall length - 7-1/2" closed, 4-1/2" Steel handle and formed swivel J-hooks for securing extra light loads in tight places Use with 1/8 - 3/16" proof coil chain (Grade 30)

Part Number	Chain Size	W.L.L.*	Take Up
10-382	1/8 - 3/16"	175#	1-1/2"



**Warning: never use above working load limits.*

Binders of all types available on special order. Call today!



ALLOY STEEL CHAIN SLINGS



DOS



CO



SOS-A
SOL-A



SSG




SOS-B
SOL-B



SOS



DOG

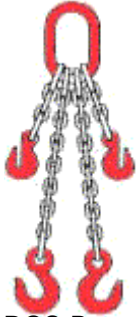


DOS-B
DOL-B

Grade 100 - Suitable for overhead lifting

OSHA Compliant

Fully certified and tagged
FREE SHIPPING on chain slings!

**CONTACT SALES FOR QUOTES
AND ORDERING**

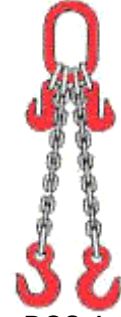

DOS-A
DOL-A

What do you need to know?

1. How many legs on your sling - (1,2 3 or 4).

2. What kind of hooks you need?
(grab, sling (slip) or self-locking.)

3. What size chain you need?


4. What is the reach (length) of the sling?



DOL




TOL



TOG

**Slings are made to order and
are nonreturnable.**

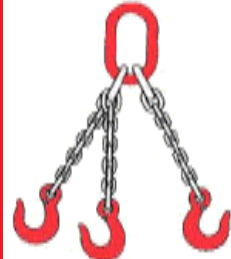

TOS



QOS



SOL



QOL



SGG



QOG

Weldless Chain

CONTACT SALES FOR QUOTES AND ORDERING

Double Loop Chain



Single Loop Chain



Jack Chain (single)



Plumber's Chain (Safety Chain)





Sash Chain



Specialty Items

These items are readily available from stock.

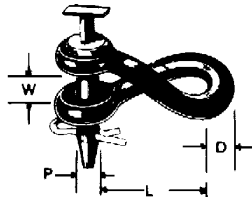

Clevises



Hoist



Gr 100 Self Locking



T-Grab



Claw



Tractor Drawbar



Round Pin Anchor Shackle



Safety Anchor Shackle



Webbing Shackle



Eye/Jaw Swivel

Clevis Grab Hooks

Grade 43 High-Test

Part Number	Chain Size	WLL*/lb	Pkg Qty
1741A	1/4	2,600	5
1742	5/16	3,900	5
1743	3/8	5,400	5
1745	1/2	9,200	5
1746	5/8	13,000	5



Use with Gr 30 or Gr 43 Chain



For Towing and Binding **NOT** for overhead lifting

Grade 70 Transport/Alloy

Part Number	Chain Size	WLL*/lb	Pkg Qty
5655	1/4	3,150	5
5656	5/16	4,700	5
5657	3/8	6,600	5
5659	1/2	11,300	5
5660	5/8	15,800	1

Use with Gr 30, Gr 43 or Gr 70 Chain



For Towing and Binding **NOT** for overhead lifting

Gr 70 Long Throat & Standard Duty Safety Latch

Part Number	Chain Size	WLL*/lb	Pkg Qty
9-650	5/16	4,700	1
9-651	3/8	6,600	1
9-652	1/2	11,300	1

Use with Gr 30, Gr 43 or Gr 70 Chain

For Towing and Binding **NOT** for overhead lifting



Gr 70 Twist Lock Heavy Duty Latched

Part Number	Chain Size	WLL*/lb	Pkg Qty
9-650HD	5/16	4,700	1
9-651HD	3/8	6,600	1

Use with Gr 30, Gr 43 or Gr 70 Chain

For Towing and Binding **NOT** for overhead lifting



Gr 80 Alloy

Part Number	Chain Size	WLL*/lb	Pkg Qty
5655	1/4	3,500	1
5656	5/16	4,500	1
5657	3/8	7,100	1
5659	1/2	12,000	1
5660	5/8	18,100	1



FOR IMPORT ADD AN "IMP" AFTER PART NUMBER

For Towing and Binding **NOT** for overhead lifting



Gr 100 Alloy For Lifting

Part Number	Chain Size	WLL*/lb	Pkg Qty
5671-100	9/32	4,300	1
5672-100	3/8	8,800	1
5673-100	1/2	15,000	1
5677-100	5/8	22,600	1
5678-100	3/4	35,300	1



US Made Non-Cradle style

Import Cradle Style

FOR IMPORT ADD AN "A" BEFORE -100

For overhead lifting



Gr 30 Weldable Grab Hooks

Part Number	Chain Size	WLL*/lb	Pkg Qty
5860	5/16	1,900	1
5861	3/8	2,650	1
5862	1/2	4,500	1



Slip Hooks

Grade 43 High-Test

Part Number	Chain Size	WLL*/lb	Pkg Qty
1748	1/4	2,600	5
1749	5/16	3,900	5
1750	3/8	5,400	5
1752	1/2	9,200	5



Use with Gr 30 or Gr 43 Chain

For Towing and Binding **NOT** for overhead lifting

Gr 70 Transport with Safety Latch

Part Number	Chain Size	WLL*/lb	Pkg Qty
1765	1/4	3,150	5
1766	5/16	5,350	5
1767	3/8	6,600	5
1768	1/2	11,300	5
1769	5/8	15,800	1

Use with Gr 30, Gr 43 or Gr 70 Chain



For Towing and Binding **NOT** for overhead lifting

Gr 80 Alloy

Part Number	Chain Size	WLL*/lb	Pkg Qty
5661	1/4	4,100	1
5662	5/16	5,100	1
5663	3/8	7,100	1
5665	1/2	13,000	1
5666	5/8	20,300	1

Use with Gr 30, Gr 43 or Gr 70 Chain



For Towing and Binding **NOT** for overhead lifting

Gr 100 Alloy For Lifting w/Safety Latch

Part Number	Chain Size	WLL*/lb	Pkg Qty
5871-100	9/32	4,300	1
5872-100	3/8	8,800	1
5873-100	1/2	15,000	1
5874-100	5/8	22,600	1
5875-100	3/4	25,300	1



For overhead lifting

Safety Hook Latch Repair Kits

Part Number	Hook Size Trade #	Hook Tons	Hook Opening**
5840	2, 22	3/4	29/32"
5841	3, 23	1	31/32"
5842	4, 24	1½	1-1/32"
5843	5, 25	2	1-1/8"
5844	6, 26	2½	1-7/32"
5845	7, 27	3	1-5/16"
5846	8, 28	4	1-1/2"
5847	9, 29	5	1-21/32"
5848	10, 30	6	1-7/8"
5849	11, 31	7	2"
5850	12, 32	10	2-5/16"
5852	34	15	3-5/32"



for pre-drilled hooks

Item No. MK655

Contents: 1 of each 5840, 5841, 5842, 5843, 5844, 5845 clearly labeled in a clear plastic 6 compartment, reusable case. Bin size 1-3/8"H x 4-1/2"D x 8-1/2"W

Item No. 16-9012

Contents: 2 of each 5840 thru 5848 along with 5821 thru 5824. Clearly labeled with actual size photos for ease of organization and refilling. Packed in a gray steel parts bin with a 12 compartment rustproof plastic bin insert. The bin is safety latched and has a handle for easy transport to the job site. Bin size 3"H x 12"D x 18"W



**Hook opening size is with latch installed.

Drop Forged. Zinc Plated. Pkg. 1 each

*WARNING: do not exceed working load limit

Chain Links

Connecting Links

The standard link for temporary or permanent chain repairs or coupling attachments. For use with proof coil chain only. Drop forged. Self-colored finish.

Part No.	Chain Size	W.L.L.*	Pkg
1712	3/16	800	10
1713	1/4	1,400	10
1714	5/16	2,000	10
1715	3/8	2,800	10
1716	7/16	3,625	10
1717	1/2	4,750	10
1718	5/8	7,250	5
1719	3/4	10,250	5



Repair Links (Lap links)

For chain repair and coupling of attachments. Low carbon steel. May be welded closed. Zinc Plated.

Part No.	Chain Size	W.L.L.*	Pkg
1731	3/16 x 1	240	25
1732	7/32 x 1-1/4	250	25
1733	1/4 x 1-1/4	400	25
1736	1/4 x 2	400	25
1734	9/32 x 1-1/4	525	25
1737	5/16 x 1-1/2	950	25
1738	5/16 x 2	1000	25
1739	3/8 x 1-5/8	1250	25
1740	3/8 x 2	1250	25
1741	1/2 x 2-1/2	2125	10
1754	5/8 x 2-1/2	1000	5



Quick Links

Fast easy connections for permanent or temporary applications with low carbon chain. Should be tightened with a wrench. Zinc finish.

Part No.	Trade Size	W.L.L.*	Pkg
5684	1/8	220	10
5685	3/16	660	10
5686	1/4	880	10
5687	5/16	1760	10
5688	3/8	2220	10
5689	1/2	3300	5



Cold Shuts

An inexpensive method of repairing or connecting chains quickly. Use next size larger than chain size for additional safety factor. For use with proof coil chain only. May be welded closed. Zinc Plated.

Part No.	Chain Size	W.L.L.*	Pkg
1723	3/16	750	25
1724	1/4	1250	25
1725	5/16	1900	25
1726	3/8	2650	25
1727	7/16	3500	10
1728	1/2	4500	10
1729	5/8	6900	10
1730	3/4	9750	10



*Safe Working Load Limit - Lbs.

Chain Links

Double Clevis Links (Mid-Links)

Forged, heat treated and tempered for permanent or temporary use to connect high-test and proof coil chain. Zinc finish. *Not for overhead lifting.* **Truckers: On-The-Job repairs possible for your tie-down chains.** Handy in the tool box to lengthen chains for special jobs

Part No.	Size	W.L.L.* /lb	Pkg Qty
5680	1/4 or 5/16	4700	5
5681	3/8	6600	5
5682	7/16 or 1/2	11300	2



Warning: Not to be used for lifting.

Grade 100 Alloy Coupling Links

Approved for overhead use. Used in field for assembling chain slings. Links have rotating load pins that resist bending and offer shear values in excess of the chain. Can be disassembled by driving locking pin out with a hammer. Painted finish. Pkg. 1 each.

Part No.	Chain Size	W.L.L.* (Lbs.)
1882-100	9/32	4,300
1883-100	3/8	8,800
1884-100	1/2	15,000
1885-100	5/8	22,600
1886-100	3/4	35,300




Screw Pin Anchor Shackles

Drop forged, heat treated and tempered. Alloy pins are used in all shackles for extra strength. All shackles are marked with size and working load limits in tons.

Not for overhead lifting. Hot Dipped Galvanized. Pkg. 1 each

Part Number	Size	Width Pin Dia.	Between Eyes	W.L.L.* Tons
1/2				
9-312	5/16	3/8	17/32	3/4
9-313	3/8	7/16	21/32	1
9-314	7/16	1/2	23/32	1-1/2
9-316	5/8	3/4	1-1/16	3-1/4
9-317	3/4	7/8	1-1/4	4-3/4
9-318	7/8	1"	1-7/16	6-1/2
9-319	1"	1-1/8	1-11/16	8-1/2
9-1/2				
9-321	1-1/4	1-3/8	2-1/32	12
9-322	1-3/8	1-1/2	2-1/4	13-1/2
9-323	1-1/2	1-5/8	2-3/8	17
9-324	1-5/8	1-3/4	2-5/8	20
9-325	1-3/4	2"	2-7/8	25
9-326	2"	2-1/4	3-1/4	35

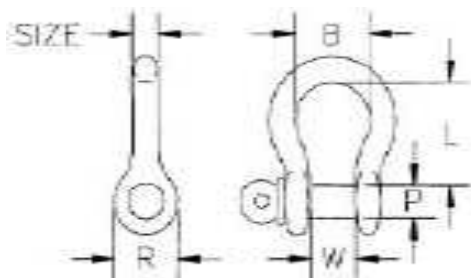

**Safe Working Load Limit.*


WARNING: Do not exceed working load limits.

Chain Links

Screw Pin Anchor Shackles Alloy

Drop forged, heat treated and tempered. Alloy pins are used in all shackles for extra strength. All shackles are marked with size and working load limits in tons. *For overhead lifting.* Alloy. Pkg. 1 each

Part Number	Size	Width		W.L.L.* Tons
		Pin Dia.	Between Eyes	
9-329	3/8	7/16	21/32	2
9-330	7/16	1/2	3/4	2-5/8
9-331	1/2	5/8	13/16	3-1/3
9-332	5/8	3/4	1-1/16	5
9-333	3/4	7/8	1-1/4	7

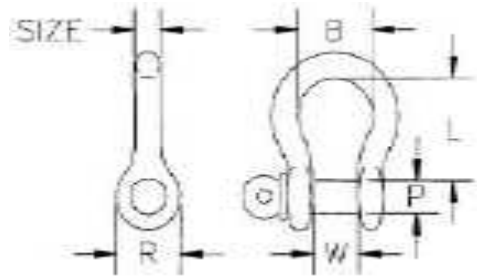


Screw Pin Anchor Shackles Stainless Steel

Drop forged, heat treated and tempered. Alloy pins are used in all shackles for extra strength. All shackles are marked with size and working load limits in tons.


Not for overhead lifting. Stainless Steel. Pkg. 1 each

Part Number	Size	Width		W.L.L.* lbs
		Pin Dia.	Between Eyes	
9-010	5/32	5/32	11-32	350
9-000	3/16	1/4	3/8	650
9-001	1/4	5/16	15/32	1,300
9-002	5/16	3/8	1/2	1,500
9-003	3/8	7/16	5/8	2,000
S0116FS12	7/16	1/2	3/4	2,000
9-004	1/2	5/8	7/8	3,000
9-005	5/8	3/4	1-1/16	4,000
9-006	3/4	7/8	1-3/16	6,000
9-007	7/8	1"	1-1/2	8,000
9-008	1"	1-1/8	1-5/8	10,000

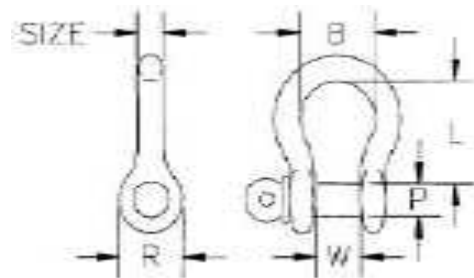

Oblong Master Link Alloy Gr 80

Part Number	Size	Inside Width	Inside Length	W.L.L.* lbs
5853	1/2	2.5	5.00	6,100
5854	3/4	2.75	5.50	12,300
5855	1"	3.50	7.00	20,800
5865	1-1/4	4.38	8.75	31,300



SUITABLE FOR OVERHEAD LIFTING

Sling Replacement Tag

- Heavy Gage (0.123")
- Zinc Plated Steel
- 1-1/4" hole diameter
- 2-1/8" x 4-1/2"


Part Number: 5859




Wire Rope (Aircraft Cable)

Galvanized cable in 7 x 7 or extra flexible 7 x 19 construction, as illustrated. It is high-strength, aircraft quality. Vinyl coated is more resistant to abrasion and weathering; it can also be cleaned easily.

Part Number	Size	Type	Safe Working Load Limit'/lb	Feet /Reel
UNCOATED				
5834	1/16	7 x 7	96	500
5835	3/32	7 x 7	184	500
5836	1/8	7 x 7	340	500
5837	3/16	7 x 19	850	250
5838	1/4	7 x 19	1400	250
5839	3/8	7 x 19	2880	250



Cross Section Flexible 7 x 7




Cross Section Extra Flexible 7 x 19

Part Number	Size	Type	Safe Working Load Limit'/lb	Feet /Reel
VINYL COATED <i>Size does not include vinyl coating.</i>				
5830	3/32	7 x 7	184	250
5831	1/8	7 x 7	340	250
5832	3/16	7 x 19	840	250
5833	1/4	7 x 19	1400	200

Wire Rope Clips (Cable Clamps)

Malleable Wire Rope Clips


Standard clip for light duty applications.



Part Number	Cable Size	Pkg Qty	Part Number	Cable Size	Pkg Qty
1684	1/16	25	1689	3/8	10
1685	1/8	25	1691	1/2	10
1686	3/16	25	1693	5/8	10
1687	1/4	10	1694	3/4	10
1688	5/16	10	1695	7/8	5
			1696	1"	5

Drop Forged Wire Rope Clips

Drop forged steel for heavy duty applications.




Part Number	Cable Size	Pkg Qty	Part Number	Cable Size	Pkg Qty
1985	1/8	10	1991	1/2	10
1986	3/16	10	1993	5/8	10
1987	1/4	10	1994	3/4	10
1988	5/16	10	1995	7/8	5
1989	3/8	10	1996	1"	5
			1998	1-1/4	2

Aluminum Cable Ferrules & Stops

Ferrules			Stops		
Part Number	Size	Pkg Qty	Part Number	Size	Pkg Qty
10-538	1/16"	50	10-544	1/16"	50
10-539	3/32"	50	10-545	3/32"	50
10-540	1/8"	50	10-546	1/8"	50
10-541	5/32"	50	10-547	5/32"	50
10-542	3/16"	50	10-548	3/16"	50
10-543	1/4"	50	10-549	1/4"	50

Wire Rope Thimbles



Cable Size	Regular Duty (Zinc)	Heavy Duty (Galv)	Pkg Qty	Cable Size	Regular Duty (Zinc)	Heavy Duty (Galv)	Pkg Qty
1/8	1700	-	10	5/16	1703	2003	10
3/16	1701	-	10	3/8	1704	2004	10
1/4	1702	2002	10	1/2	1705	2005	10